



13.22




EN 60669-1/EN 60669-2-1																							
	13.22.8.230.B000 U_N 110...230 V AC (50/60 Hz) U_{min} 96 V AC U_{max} 253 V AC P 2 VA (50 Hz)/0.5 W																						
	2 NO (DPST-NO) 6 A 230 V AC																						
	<table border="1"> <tr> <th></th> <th>110 V</th> <th>230 V</th> </tr> <tr> <td>AC1</td> <td>650 VA</td> <td>1380 VA</td> </tr> <tr> <td>AC15</td> <td>150 VA</td> <td>300 VA</td> </tr> <tr> <td></td> <td>100 W</td> <td>200 W</td> </tr> <tr> <td></td> <td>100 W</td> <td>200 W</td> </tr> <tr> <td>CFL-LED</td> <td>100 W</td> <td>200 W</td> </tr> <tr> <td></td> <td>100 W</td> <td>200 W</td> </tr> </table>		110 V	230 V	AC1	650 VA	1380 VA	AC15	150 VA	300 VA		100 W	200 W		100 W	200 W	CFL-LED	100 W	200 W		100 W	200 W	
	110 V	230 V																					
AC1	650 VA	1380 VA																					
AC15	150 VA	300 VA																					
	100 W	200 W																					
	100 W	200 W																					
CFL-LED	100 W	200 W																					
	100 W	200 W																					
	(-10...+50)°C																						
	5 (≤1 mA)																						
IP20																							

2 **Bluetooth™**

Download on the **App Store**

FINDER TOOLBOX

GET IT ON **Google Play**

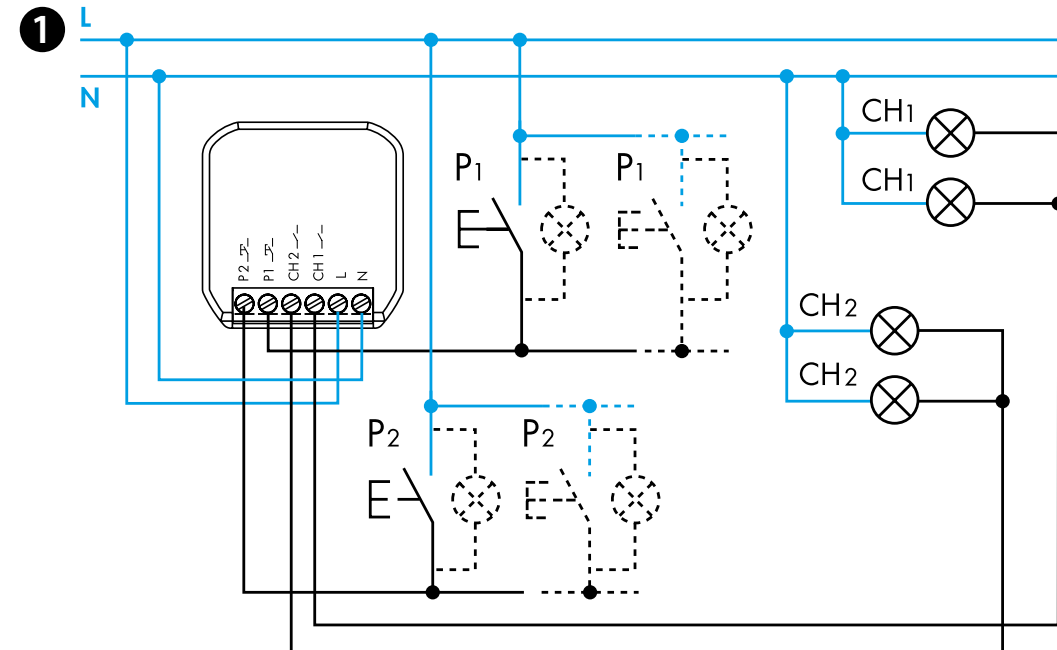

4

02				
03				
04				
05				
06				
07				
08				

3

RI		DE	
RM		FZ	
BE		IP	
BP		IT	
LE			
ME			
MP			

5

Smartphone
Wireless pushbutton
Voice assistant

ENGLISH

13.22.8.230.B000 MULTI-FUNCTION RELAY

1 WIRING DIAGRAM
Channel 1: Ch1 - pushbutton 1 (P1)
Channel 2: Ch2 - pushbutton 2 (P2)

2 FINDER TOOLBOX APPLICATION
With the Finder Toolbox App you can:
- Set the functions, the Sequences and the timing (T1, T2) on the Ch1 - Ch2 channels
- Associate the wireless pushbutton
- Set the scenarios

NOTE
- Transmission range: approximately 10 m in free space and without obstacles
- The transmission range may vary depending on the building structure
Example:
- Reinforced concrete walls and/or metal walls
- Partition walls filled with insulating wool on a metallic backing
- Ceilings with metal or carbon fiber panels
- Lead glass or glass with metal cladding, steel furniture

3 FUNCTIONS for single channel
The Ch1 and Ch2 channels are independent and can be set with different functions. Timings (T1, T2): from 1s to 24h.
Ri: factory pre-set function on both channels

4 FUNCTIONS using both channels
Switching sequences 02 to 08 work on both Ch1 and Ch2.
NOTE
P1 (SET): leads to the next state
P2 (RESET): leads to the initial state

5 FUNCTION RiA
RiA: Step relay (switch control)
A traditional lighting system with switch, diverter and inverter, can be remotely controlled with the Finder YESLY App, using wireless pushbuttons, or via a voice assistant.



Utility Model - IB1322VXX - 02/20 - Finder S.p.A. con unico socio - 10040 ALMESE (TO) - ITALY