





13.11

	13.11.8.230.0000 U_N (230...240)V AC (50/60 Hz) U_{min} 184 V AC U_{max} 264 V AC P 1.7 VA / 0.7 W										
	1CO (SPDT) 12 A 250 V AC <table border="0"> <tr> <td>AC1</td> <td>3000 VA</td> </tr> <tr> <td>AC15 (230 V AC)</td> <td>750 VA</td> </tr> <tr> <td></td> <td>(230 V AC) 1200 W</td> </tr> <tr> <td></td> <td>(230 V AC) 400 W</td> </tr> <tr> <td>CFL-LED (230 V)</td> <td>300 W</td> </tr> </table>	AC1	3000 VA	AC15 (230 V AC)	750 VA		(230 V AC) 1200 W		(230 V AC) 400 W	CFL-LED (230 V)	300 W
AC1	3000 VA										
AC15 (230 V AC)	750 VA										
	(230 V AC) 1200 W										
	(230 V AC) 400 W										
CFL-LED (230 V)	300 W										
	(-10...+60)°C										
IP20											

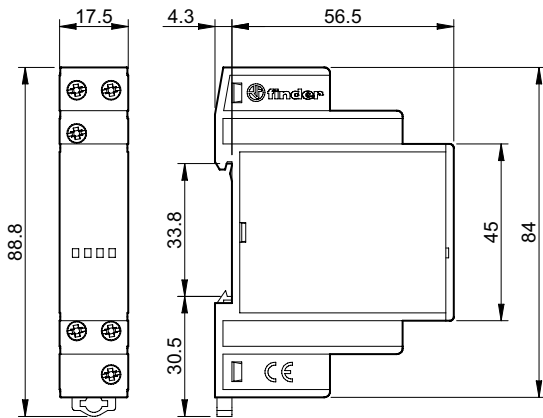

1

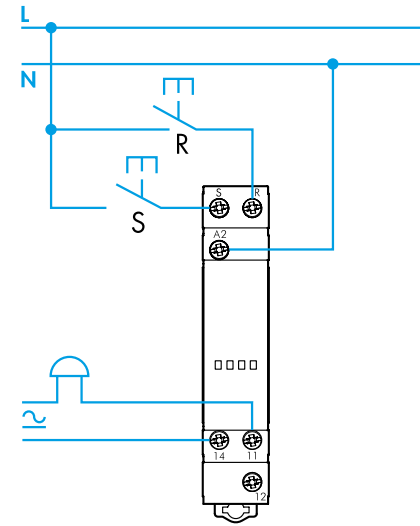

POLSKI

13.11 DWUPOŁOWY PRZEKAŹNIK Z FUNKCJĄ PRZYWOŁANIE/RESET

1 SCHEMAT PODŁĄCZENIA (przykład)

2 FUNKCJE

Upewnij się, że urządzenie na wyjściu może być sterowane sygnałem ciągłym

UWAGA

Maks. czas załączenia: 10 s (Min. 100 ms)

Maks. długość przewodu do łączników: 100 m

2

