



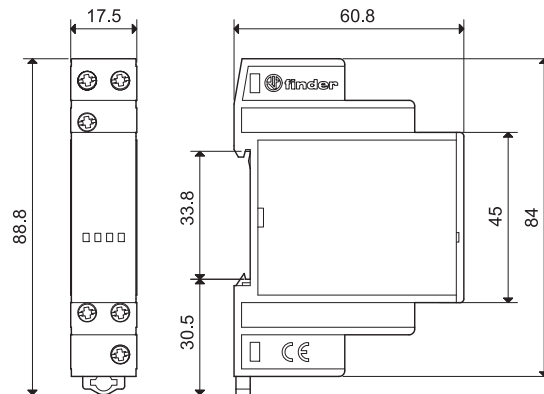
	13.11.8.230.0000 U _N (230...240) VAC (50/60 Hz) U _{mi} 184 VAC U _{max} 264 VAC	
	P _(AC/DC) 1.7 VA/0.7 W	
	1CO (SPDT) 12 A 250 VAC	
	AC1	3000 VA
	AC15 (230 VAC)	750 VA
	 (230 VAC)	1200 W
	 (230 VAC)	400 W
	CFL - LED (230 V)	300 W
	(-10...+60)°C	
	IP20	

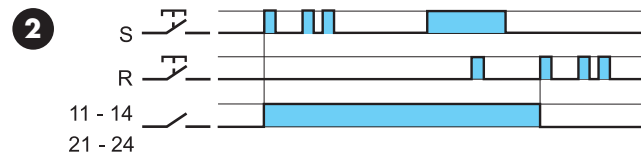
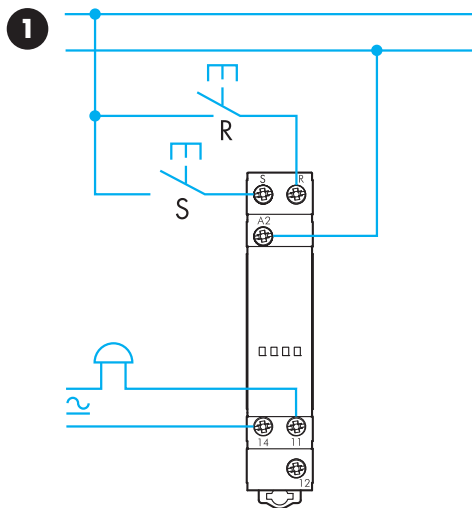

13.11 PRIVOLÁVACIE RELÉ
1 SCHÉMA ZAPOJENIA
2 FUNKCIE




*Overte, či pripojená záťaž je zlučiteľná s trvalým napájaním

POZNÁMKA

Max. doba zopnutia ovládania: 10 s (min. 100 ms)

Dĺžka prívodov k tlačidlám max.: 100 m



		
0.8 Nm	(1x6/2x4) mm ² (1x10/2x12) AWG	(1x4/2x2.5) mm ² (1x12/2x14) AWG