

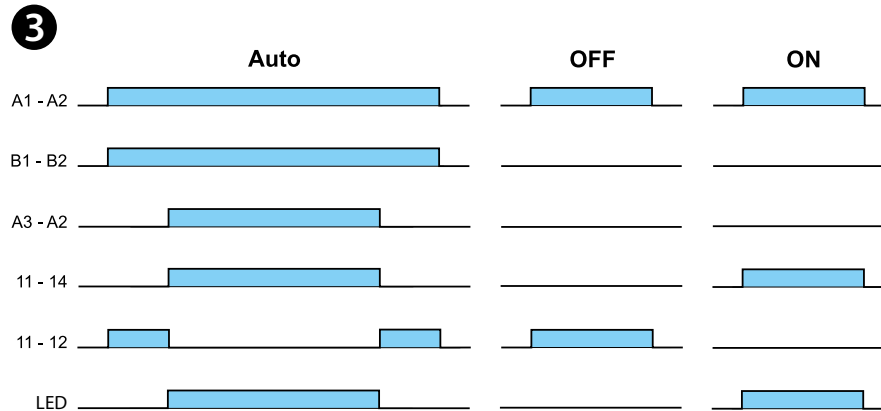
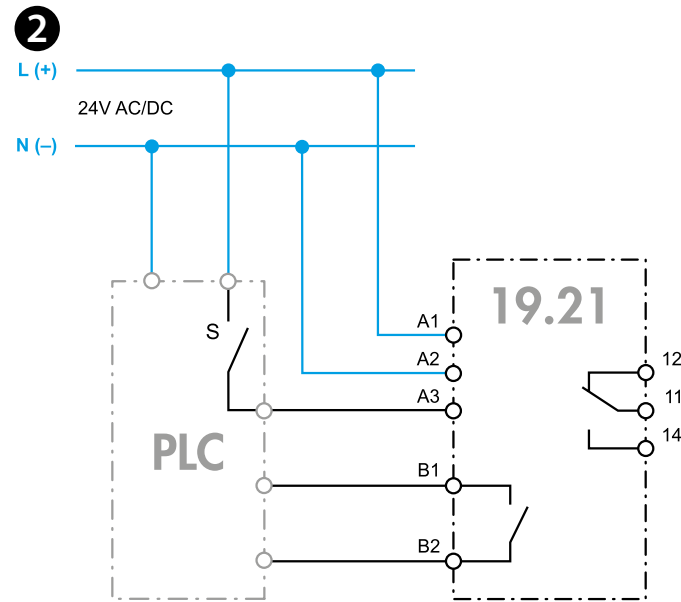


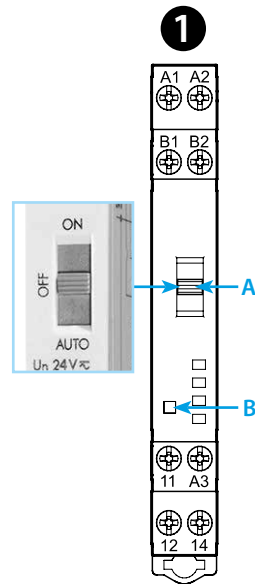

19.21

	19.21.0.024.0000 U _N 24 V AC (50/60 Hz) / DC U _{min} - U _{max} (19.2 - 26.4)V AC/DC P 0.6 VA / 0.4 W
	1CO (SPDT) 10 A 250 V AC
	AC1 2500 VA AC15 (230 V AC) 500 VA M (230 V AC) 0.44 kW DC1 (24/110/220)V (10/0.3/0.12)A
	(-20...+50)°C
IP20	

B1 - B2	1 NO (SPST - NO)
	300 mA
	24 V AC/DC

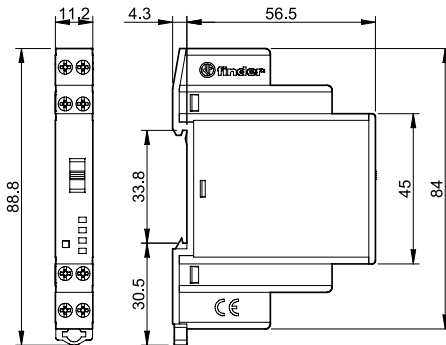

ENGLISH

19.21 AUTO/OFF/ON OUTPUT MODULE

- FRONT VIEW**
 - A Function selector switch:
 - AUTO works as a monostable relay (following A3 input)
 - OFF relay permanently OFF
 - ON relay permanently ON
 - B LED: relay ON
- CONNECTION DIAGRAM**

NOTE

The max switching voltage between B1 and B2 terminal is 24 V AC/DC (300 mA)
- FUNCTIONAL DIAGRAM**
 - B1 - B2 feed back information to the controller for Auto-operation
 - A3 - A2 from the controller requested operation