


	U_N 110 V AC (50/60 Hz)	U_N 230 V AC (50/60 Hz)
	$U_{min} - U_{max}$: 0.8 - 1.1 U_N (50 Hz) 0.85 - 1.1 U_N (60 Hz)	
	1NO (SPST-NO) (27.01)	2NO (DPST-NO) (27.05 / 27.06)
	10 A 110 V AC	10 A 230 V AC
	AC1 1100 VA AC15 250 VA	AC1 2300 VA AC15 500 VA
	180 W	1000 W 360 W
	(-40...+40)°C	
	4 (1mA)	
IP 20		

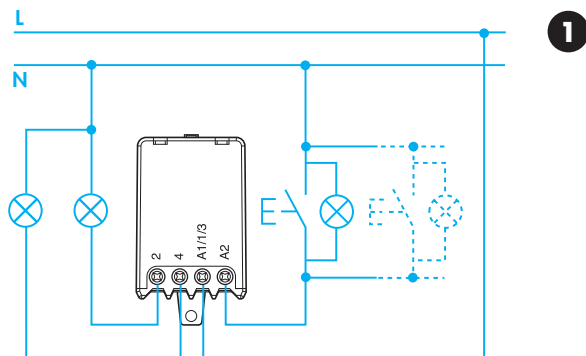

27.0x SPÍNAČ IMPULZNE OVLÁDANÝ KOMPAKTNÝ, 10 A

- 1 Schéma pripojenia**
- 2 Postup krokov**
- 3 Modul pre ovládanie presvetlenými tlačítkami**
Pre ovládanie presvetlenými tlačítkami je treba modul 00.27 pre až 24 presvetlených tlačítok (max.1 mA/230 V). Modul sa montuje priamo na spínač.

	počet krokov	postup krokov			
		1	2	3	4
27.01	2				
27.05	4				
27.06	3				

