

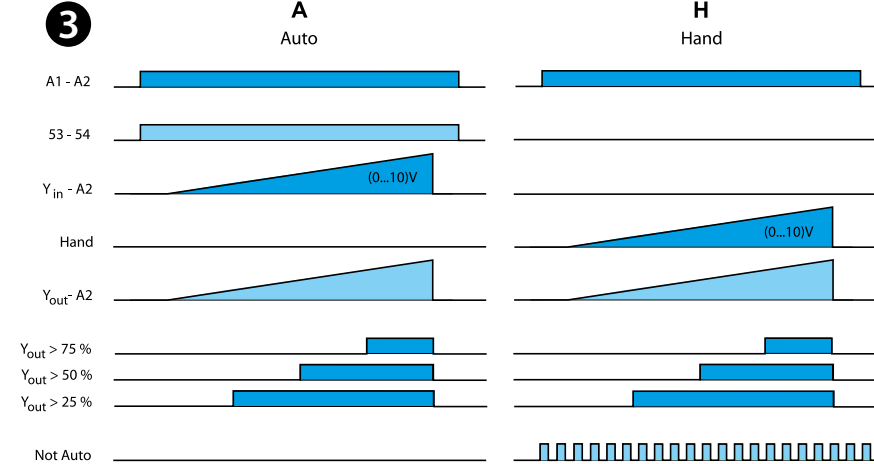


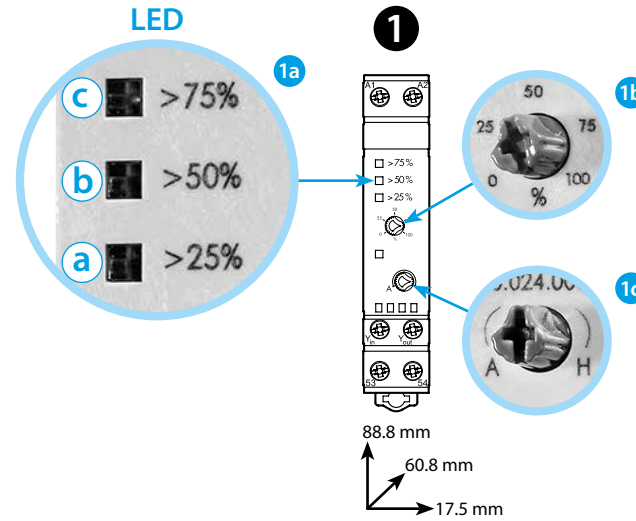

19.50

	19.50.0.024.0000 U _N 24 V AC (50/60 Hz)/DC U _{min} - U _{max} (19.2-26.4)V AC/DC P 0.9 VA (50 Hz)/0.7 W
	(-20...+50)°C
IP20	

Y - in	(0...10)V DC (I _{max} 20 mA) LED a > 2.5 V LED b > 5 V LED c > 7.5 V
53 - 54	1 NO (SPST-NO) 100 mA (I _{min} 10 mA) 24 V AC/DC

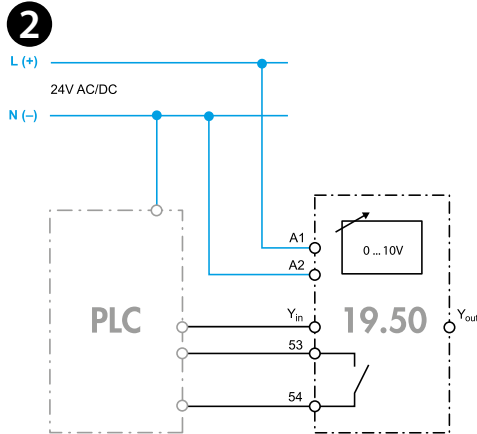

ENGLISH

19.50
ANALOGUE (0...10)V OVERRIDE MODULE-AUTO/HAND

- 1 FRONT VIEW**
- 1a LED-signal level indicator
 - a Output signal > 25%
 - b Output signal > 50%
 - c Output signal > 75%
 - 1b Regulator: set the regulator to produce the desired signal between 0 - 10 V DC (calibrated 0-100%)
 - 1c Switch to select Auto (A) or Manual (H) mode
- 2 WIRING DIAGRAM**
(example - PLC application)
- 3 FUNCTION**
In switch position A (Automatic) the signal at terminal Y_{in} is passed to terminal Y_{out}.
In switch position H (Hand) it is the signal level set by the regulator that is passed to terminal Y_{out}.

