




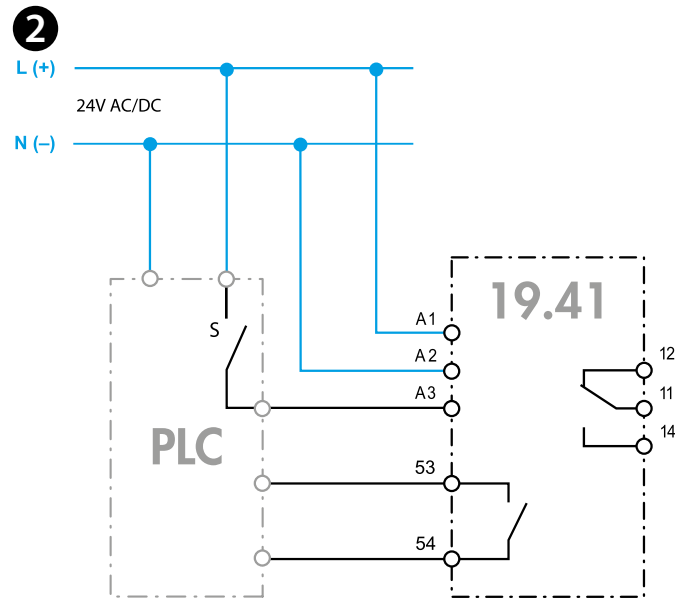


19.41

	19.41.0.024.0000 U _N 24 V AC (50/60 Hz) / DC U _{min} - U _{max} (19.2-26.4)V AC / DC P 1 VA (50 Hz) / 0.6 W
	1 CO (SPDT) 5 A 250 V AC
	AC1 1250 VA
	AC15 (230 V AC) 250 VA
	M (230 V AC) 0.185 kW
	DC1 (24/110/220) V (3/0.35/0.2)A
	(-20...+50)°C
IP20	

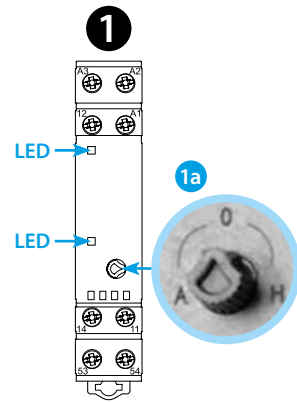

53-54	NO (SPST-NO)
	100 mA (I _{min} 10mA)
	24 V AC/DC

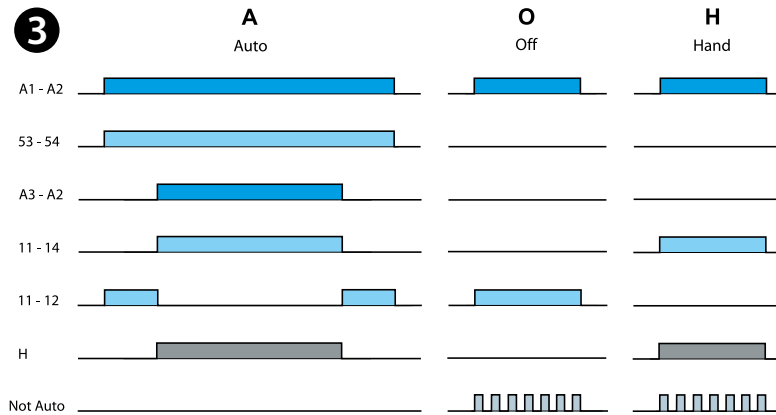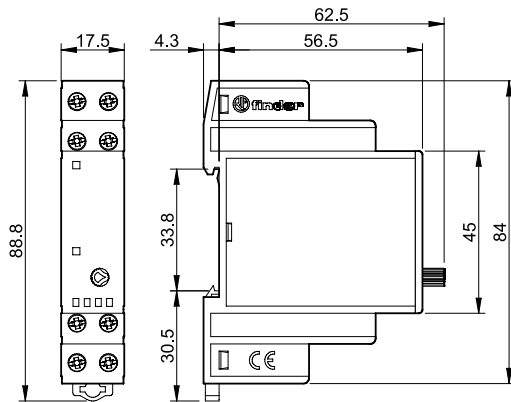

19.41 DIGITALE 1-KANAALS MELDMODULE

- 1 FRONTAANZICHT**
1a 3-standen functieschakelaar:
A (Auto) functioneert als een monostabiel relais (volgt A3 ingang)
O (Off) relaisuitgang permanent UIT
H (Hand) relaisuitgang permanent AAN

- 2 AANSLUITSCHEMA**
 (toepassingsvoorbeeld)

- 3 FUNCTIE**

OPMERKING
 53 - 54 terugmelding naar de besturing bij stand AUTO
 A3 - A2 door de besturing gewenste werking