

# REPORT

## ATEX products



**finder**<sup>®</sup>  
SWITCH TO THE FUTURE

**NEW**




## ATEX 2014/34/EU compliant relays, interface and timers

New to the Finder range  
ATEX compliant versions of the  
Type 39.81/91 timer interface,  
Type 86.30 timer module for  
the 58 Series, and a new PCB  
66 Series power relay with  
2 changeover contacts.

Special versions for  
Zone 2 installations (Gas).

### Applications

- Chemical, petrochemical and pharmaceutical plants
- Gas stations, garages and underground areas
- Spray booths (liquid)
- Gas power plants
- LPG depositories
- Refrigerators
- Air conditioning systems

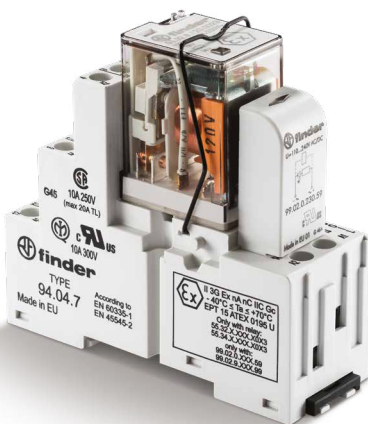



Compliant with: EN 60079-0:2012+A11:2013,  
EN 60079-15:2010,  
EN 60079-7:2015,  
Directive 2014/34/EU

**39 Series**




- Relay interface module**  
 Type 39.11.x.xxx.0073 - Screw terminal  
 Type 39.10.x.xxx.0073 - Push-in terminal  
**Certification: EPTI 17 ATEX 0303 U**
- 1 CO 6 A
  - Nominal voltage: from 6 to 240 V AC/DC  
from 6 to 24 V DC  
230 V AC
  - Integral coil indication
  - Multivoltage version



- Slim timed interface module**  
 Type 39.81.x.xxx.0073 - Screw terminal  
 Type 39.91.x.xxx.0073 - Push-in terminal  
**Certification: EPTI 17 ATEX 0303 U**
- 1 CO 6 A
  - Nominal voltage: 12 and 24 V AC/DC
  - Timer adjustment via top mounted rotary knob with integral coil indication - accessible after assembly
  - Multi-function
  - DIP-switch for selection from: 8 functions  
4 time scale: from 0.1s to 6h

**58 Series**



- Relay interface module**  
**Certification: EPT 15 ATEX 0195 U**
- 2 or 4 CO - 10 and 6 A
  - Nominal voltage: from 12 to 125 V DC  
from 12 to 230 V AC
  - Supply status indication as standard
  - Screw terminal

**86 Series**



- Timer module for use in conjunction with Relay interface module**  
**58 Series ATEX versions**  
**Certification: EPTI 17 ATEX 0264 U**
- DIP-switch for selection of: 2 functions (AI: ON-Delay, DI: Interval)  
7 time scale: from 0.05s to 100h
  - LED indicator
  - Plug-in mount

**66 Series**



- Power relay**  
**Certification: EPTI 17 ATEX 0299 U**
- 2 changeover contacts: 25 A NO - 10 A NC
  - Nominal voltage: from 6 to 240 V AC  
from 6 to 125 V DC
  - PCB mount