

REPORT

7S Series



finder[®]
SWITCH TO THE FUTURE

Relay modules
with forcibly
guided contacts
for safety
applications
up to SIL 3

Type 7S.43 and 7S.63




Features

- 3 pole: 2 NO + 1 NC, 6A
- Auxiliary contact: 1 NO 6 A
- Double channel architecture (1oo2)
- Contact material AgSnO₂ & AgNi+Au
- Screw and Screwless terminal version available
- 22.5 mm wide
- 35 mm rail (EN 60715) mounting

NEW

- Safety expansion module with class A forcibly guided contact relays EN 61810-3 (previously EN 50205) for safety application up to SIL 3
- SIL 3 evaluated according to EN 61508, for use in functional safety application according to EN 62061 up to SIL 3 and according to IEC 13849-1 up to PL e
- Coils from 24 to 110 V DC with operating range $(0.85...1.1)U_N$
- LED indication of coil status

Screwless terminals

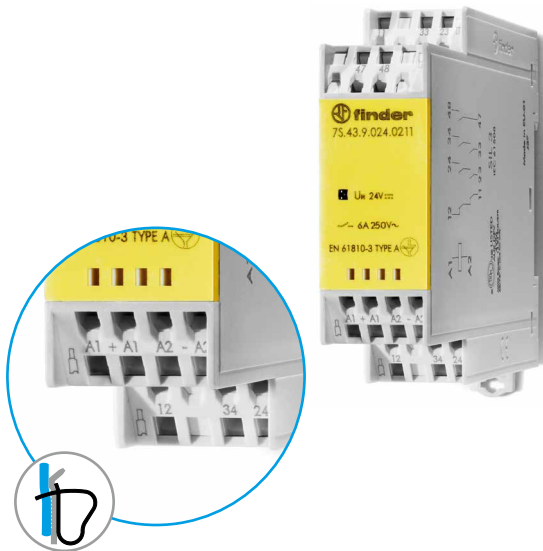

Type 7S.43.x.xxx.0211

- 3 pole (2 NO + 1 NC)
- Double channel architecture (1oo2)
- Rated current 6 A
- Nominal coil voltage: 12 - 24 - 48 - 110 V DC
- Cadmium free contacts
- Contact material $AgSnO_2$ & $AgNi+Au$


Screw terminals



Type 7S.63.x.xxx.0211

- 3 pole (2 NO + 1 NC)
- Double channel architecture (1oo2)
- Rated current 6 A
- Nominal coil voltage: 12 - 24 - 48 - 110 V DC
- Cadmium free contacts
- Contact material $AgSnO_2$ & $AgNi+Au$

Contact diagram



11		33	23
	47	48	
A1	A1	A2	A2
12		34	24

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property, caused as a result of the incorrect use or application of its products.

ZDPENX75EN - X1/18 - Printed in Italy - Report 7S Series - On-line updates